

Polar®

Grip

Polar® Grip's unique high bond adhesive is designed to stick to products with low surface energy, making it suitable for adhering graphics or decals to machine equipment, motorcycle helmets, Sintra®, smooth plastic substrates or coarse surfaces such as brick or concrete. Unlike most self-adhesive vinyls, Polar® Grip has a thicker adhesive layer that creates a tighter grip on porous materials. When applications require greater flexibility and high bond adhesion, Polar® Grip is an ideal choice.

- IDEAL FOR GRAPHICS OR DECALS ON MACHINE EQUIPMENT
- SUITABLE FOR INDOOR & OUTDOOR USE
- THE AGGRESSIVE ADHESIVE IS IDEAL FOR LOW SURFACE ENERGY SUBSTRATES
- BONDS WELL TO BRICK OR COARSE CONCRETE SURFACES WITH HEAT

Product Code: PGM & PGG

80
micron

White
Polymeric
PVC

Matte or Gloss



(Eco)Solvent
Latex
UV



High Coat Weight
Grey Permanent
Acrylic (Pressure Sensitive)




Widths up to 1524mm



7 YEARS DURABILITY
INTERIOR & EXTERIOR
(with matching overlamine)

STICKS TO PRODUCTS WITH LOW SURFACE ENERGY

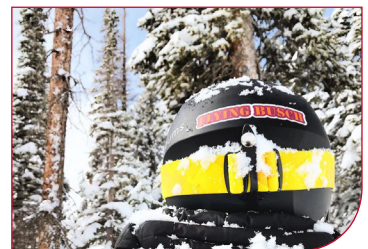

APPLICATIONS

MACHINERY SIGNAGE
LOW ENERGY SUBSTRATES
MOTORCYCLE HELMETS
BRICK WALLS

DRYTAC®
ADHESIVE SCIENCE

www.drytac.com

Polar®

Grip

Polar® Grip is a 3.2 mil (80µ) premium, white polymeric self-adhesive PVC film with a high coat weight, permanent, pressure sensitive grey acrylic adhesive that is protected by a 140 gsm 2 side PE coated, 1 side siliconised white kraft release liner. The film's unique aggressive adhesive makes it suitable for graphic applications where flexibility and high bond adhesion are desired.

- THE AGGRESSIVE ADHESIVE IS IDEAL FOR LOW SURFACE ENERGY SUBSTRATES
- SUITABLE FOR INDOOR & OUTDOOR USE
- GREAT FLEXIBILITY AND HIGH BOND ADHESION

INSTALLATION RECOMMENDATION

The surface must be clean and free of defects before application. Please refer to the application guide for use on rough surfaces.

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2019 Drytac Corporation. E&OE. All other trademarks are the property of their respective owners.

02062020

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

Film	Matte or Gloss White Polymeric PVC
Adhesive	High Coat Weight Grey Permanent Acrylic (Pressure Sensitive)
Release Liner	140 gsm 2 Side PE Coated, 1 Side Siliconised White Kraft

PRODUCT CHARACTERISTICS

Film Thickness	3.2 mil (80µ)	4.6 mil (116.84µ µ)
Adhesive Layer	1.4 mil (35µ)	
Outdoor Durability	7 years with matching laminate	
Fire Ratings	Class C -s1,d0 (EN 13501-1) Class A or 0 (ASTM E-84) PASS (CAN/ULC-S102)	
Paired Solution Fire Rating	B _{f1} - s1 (EN 13501-1) when paired with Interlam Pro Emerytex	
Peel Adhesion (24h, FTM1)	30 N/25mm	
Application Temperature	>-5°F (-20°C)	
Service Temperature Range	-49°F to 230°F (-45°C to 110°C)	
Shelf Life	1 year	
Storage Conditions	59°F to 72°F (15°C to 22°C);	

OVERLAMINATE RECOMMENDATIONS

When using Polar® Grip, an overlamine can be used for maximum life expectancy. Products recommended for use with Polar® Grip are Drytac's Weathershield™, Protac™ and Interlam™ Pro overlaminates.

For floor graphics, it is recommended to use a slip certified overlamine such as Drytac's Interlam™ Emerytex® or Protac™ Scuffguard™.

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

30 Driver Road,
Brampton,
Ontario, L6T 5V2,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5401-B Eubank Road,
Sandston,
Virginia, 23150,
USA
customerservice@drytac.com
Tel: +1 800.280.6013

DRYTAC®
ADHESIVE SCIENCE

www.drytac.com